Cetis

2026 PRODUCT GUIDE



TELEMATRIX a Cetis brand

TELEDEX a Cetis brand

SCITEC a Cetis brand

Cetis | APPLIANCES

TOPS a Cetis brand

TSOC HOSPITALITY

web: www.tsochospitality.com
email: hospitality@tsoc.com
phone: 1-888-258-8762

Cetis®

2026 Product Guide

Five Legendary Brands.
One Unified Experience.

TELEDEX® a Cetis brand

TELEMATRIX® a Cetis brand

SCITEC® a Cetis brand

Cetis | APPLIANCES

TOPS™ a Cetis brand

Table of Contents

Innovating Hospitality Since 1982.

I-900 Garment Steamer  3

HD-618 Hair Dryer  4

K-100 Electric Kettle  5

K-608 Electric Kettle  6

SP-100 Tray & Caddy  7

S-100 Weight Scale  8

V-Series  9

E-Series  11

M-Series  13

I-Series  15

Diamond Series  17

D-Series  19

Opal Series  21

Nugget Series  23

BUNDLE & SAVE 24

3500/9700 Series  25

Retro Series  27

3100 Series  28

9600/9400 Series  29

3300 Series  31

Aegis-08 Series  33

H3000 Series  34

2500 Series  35

Emergency Phones  36

TOPS Faceplate Printing TOPS a Cetis brand 37

Cetis Appliances I-900 Garment Steamer










Product	Part Number
I900 Garment Steamer Black	GS91B
I900 Garment Steamer Gray	GS96B

Cetis | APPLIANCES

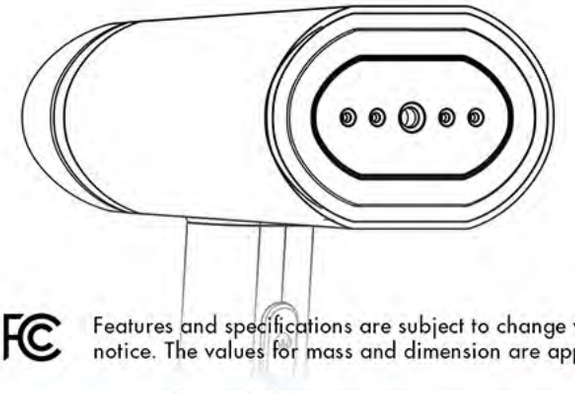

CE FC Features and specifications are subject to change without notice. The values for mass and dimension are approximate.

Features

- Small size, easy to lift, unlimited use
- Three-state automatic shutoff for safety
- Wear-resistant & non-stick base plate
- Quick 30-second preheating
- Easy to operate, one-button steam system

Design

- Sleek, intuitive build
- Optional matching wall mount kit available
- Semi-matte finish
- Rotating power cord for ease of use
- Water resivoir with level indicator
- Simple button-to-vapor release

Specifications

- **Household type:** 1-900
- **Rated source:** 220V~50Hz/120V~60Hz
- **Rated Power:** 1000W
- **Water tank capacity:** 100ml/3.38 fl oz
- **Size:** 170 x 89 x 240mm/6.69 x 3.50 x 9.45in (including water tank)
- **Weight:** 638g/1.40lbs
- **Certification:** Meets all safety requirements
- **Warranty**: 1 year



Cetis Appliances HD-618 Hair Dryer




Color Options:



Product	Part Number
HD-618 Hair Dryer Black	HD6181B
HD-618 Hair Dryer Grey	HD6186B

Cetis | APPLIANCES

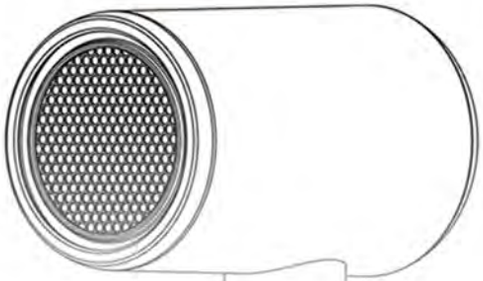

CE FC Features and specifications are subject to change without notice. The values for mass and dimension are approximate.

Features

- Double-layer thermal insulation for higher energy efficiency
- Double-layer intensive air inlet
- Distribution of 10 million/cm3 negative ions for hair care
- High-temperature power-off protection for greater safety
- Hot/Cold Temperature, Hi / LO blower, Easy to operate

Design

- Wide-mouth centrifugal air outlet grille
- Double-air inlet grille eliminates hair blockage
- Simple storage options

Specifications

- **Folding pattern:** Non-fold
- **Power:** 1875W
- **U.S. rated power requirements:** 120V; 50Hz
- **International rated power requirements:** 220V-240V; 50 Hz
- **Blowing modes:** Cold, hot
- **Switch type:** toggle switch selection
- **Settings:** Hot/Cold Temperature, Hi / LO blower
- **Product dimensions:** 106mm x 74mm x 248mm
- **Gift box dimensions:** 128mm x 83mm x 250mm
- **Case dimensions:** 525mm x 280mm x 285mm
- **Case weight:** 16.09lbs (7.3kg)
- **Case:** 12 units
- **Weight:** 1.07lbs (488 g)
- **Certification:** CE & ETL certified
- **Warranty:** 1 year



Cetis Appliances K-100 Electric Kettle










Product	Part Number
K100 Elecric Kettle Black	K11B
K100 Electric Kettle Grey	K16B

Cetis | APPLIANCES

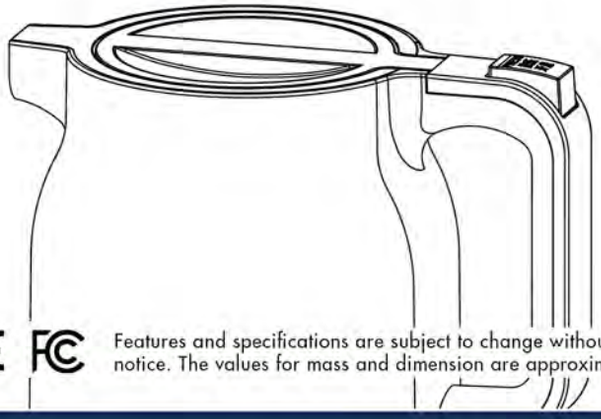

CE FC Features and specifications are subject to change without notice. The values for mass and dimension are approximate.

Features

- Holds up to 27fl.oz (0.8L)
- Triple layer anti-scalding insulation keeps water hot on the inside but safe to touch on the outside
- Thermostatically limited for safety
- Food grade seamless 304 Stainless steel liner prevents odor, easy cleanup, and low maintenance
- Efficient heating element boils water quickly, saving energy and time
- Specially designed spigot for easy flow and no drips

Design

- Large diameter lid for easy fill and cleaning
- Sealed lid prevents dust and debris from entering
- Highly visible LED lighted power toggle switch
- Separate removable base and cable management system for easy storage
- Stable non-slip base for quiet and safe operation

Specifications

- **Cups:** 2 to 4
- **Capacity:** 27.05 fl oz (0.8 liter)
- **Power:** 1200WInput
- **U.S. rated power requirements:** 120V; 60Hz
- **International rated power requirements:** 220-240V; 50Hz
- **Product material:** Stainless steel/PP
- **Product dimensions:** 193mm x 143mm x 203mm
- **Gift box dimensions:** 195mm x 168mm x 180mm
- **Case dimensions:** 530mm x 405mm x 377mm
- **Case weight:** 28.66lbs (13.0kg)
- **Case:** 12 units
- **Weight:** 2.03lbs (920 g)
- **Certification:** Meets all safety requirements
- **Warranty:** 1 year

Cetis Appliances K-608 Electric Kettle










Product	Part Number
K-608 Electric Kettle Black	K6081B
K-608 Elecric Kettle Grey	K6086B

Cetis | APPLIANCES

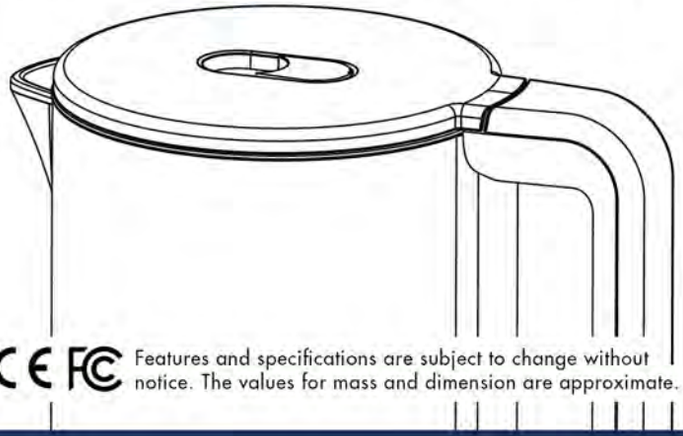

CE FC Features and specifications are subject to change without notice. The values for mass and dimension are approximate.

Features

- Holds up to 27fl.oz (0.8L)
- Triple layer anti-scalding insulation keeps water hot on the inside but safe to touch on the outside
- Thermostatically limited for safety
- Food grade seamless 304 Stainless steel liner prevents odor, easy cleanup, and low maintenance.
- Efficient heating element boils water quickly, saving energy and time
- Specially designed spigot for easy flow and no drips

Design

- Large diameter lid for easy fill and cleaning
- Sealed lid prevents dust and debris from entering
- Highly visible LED lighted power toggle switch
- Separate removable base and cable management system for easy storage
- Stable non-slip base for quiet and safe operation

Specifications

- **Cups:** 2 to 4
- **Capacity:** 27.05 fl oz (0.8 liter)
- **Power:** 1200WInput
- **U.S. rated power requirements:** 120V; 60Hz
- **International rated power requirements:** 220-240V; 50Hz
- **Product material:** Stainless steel/PP
- **Product dimensions:** 217mm x 131mm x 191mm
- **Gift box dimensions:** 195mm x 168mm x 180mm
- **Case dimensions:** 530mm x 405mm x 384mm
- **Case weight:** 27.11lbs (12.3kg)
- **Case:** 12 units
- **Weight:** 2.03lbs (920 g)
- **Certification:** Meets all safety requirements
- **Warranty:** 1 year

Cetis Appliances SP-100 Tray & Caddy Kit



Color Options:







Features

- Caddy holder for condiments, stir sticks, etc.
- Rubber pegs increase stability and reduce accidents.
- Indention fits K-100 & K-608 electric kettles perfectly for sleek, safe storage.

Specifications

- **Case Quantity:** 12 units
- **Size:** 262mm x 442mm x 56mm
- **Warranty:** 1 year

Product	Part Number
SP100 Tray & Caddy Kit Black	SP11
SP100 Tray & Caddy Kit Grey	SP16



Cetis | APPLIANCES CE FC

Features and specifications are subject to change without notice. The values for mass and dimension are approximate.

Cetis Appliances S-100 Weight Scale



Color Options:



Features

- Maximum scale weight is 441lbs (200 kg)
- Toughened glass tested to 1250x compression
- Third generation back type sensor
- Precision to 0.22lbs (0.1 kg)

Design


- Long standby time for up to 365 days
- Large standing platform for easy use.
- Ultra-thin anti-skid design
- Bright White OLED display for easy visibility

Specifications

- **Scale surface:** 0.31in (8 mm) tempered glass
- **Power supply:** Three AA batteries (not included)
- **Weighing scope:** 6.6-440lbs (3.0 -200 kg)
- **Indexing accuracy:** 0.22lbs (100 g)
- **Backlight weight:** 11.0lbs (5.0 kg)
- **Product dimensions:** 343mm x 330mm x 64mm
- **Gift box dimensions:** 330mm x 330mm x 62mm
- **Case dimensions:** 350mm x 350mm x 395mm
- **Case weight:** 33.07lbs (15.0kg)
- **Case:** 6 Units
- **Weight:** 4.85lbs (2.2 kg)
- **Certification:** Meets all safety requirements
- **Warranty:** 1 year

Product	Part Number
S-100 Weight Scale Black	S11
S-100 Weight Scale Grey	S16

Cetis | APPLIANCES

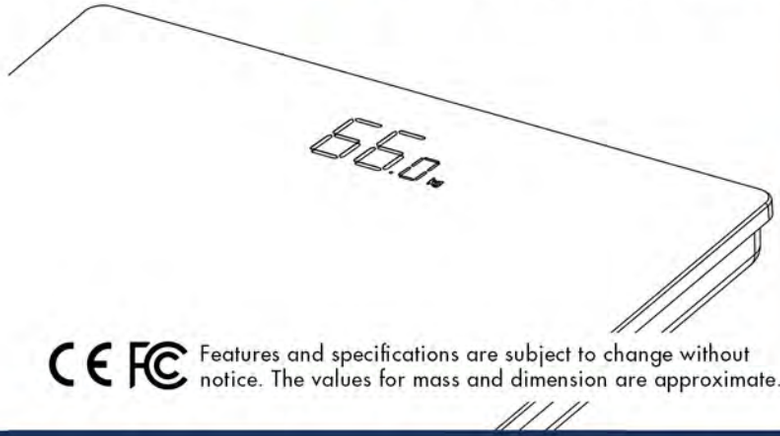



CE FC Features and specifications are subject to change without notice. The values for mass and dimension are approximate.

V-Series



Handset
Color Options:







Analog Corded	Part Number
V100LBY/Black	VA10N0L
V100MWS/Black	VA110S0D
V100MWD1/Black	VA110S1D
V100MWD3/Black	VA110S3D
V100MWD5/Black	VA110S5D
V100MWD/Black	VA110S10D
V100MWS/Black Silver	VA310S0D
V100MWD1/Black Silver	VA310S1D
V100MWD3/Black Silver	VA310S3D
V100MWD5/Black Silver	VA310S5D
V100MWD/Black Silver	VA310S10D

CE FC Features and specifications are subject to change without notice. The values for mass and dimension are approximate.

Elevating Hospitality Vertically

The V-Series reimagines the in-room phone through a vertical design that saves space, sharpens aesthetics, and supports modern guest expectations. With a remarkably small footprint and customizable design details, it delivers full-feature performance without overwhelming the room.

Designed for properties that value visual cohesion and operational reliability, the V-Series blends minimalism with purpose. Proving that compact can still be powerful.

Design & Functionality

- Ultra-small footprint: 3.5″ x 4.5″ x 7.4″
- Streamlined Vertical Form
- Concealed dial plate beneath handset
- PoE allows full functionality without an AC power cord, simplifying installation and reducing cable clutter.
- Optional speakerphone capability
- Matte finish resists fingerprints, smudges & scratches
- Fully customizeable faceplate
- 0, 1, 3, 5, or 10 Guest Service Keys
- Multi-step volume control for both handset and speakerphone
- Patented touchlite for hands free voicemail retrieval.
- Mute feature with visual confirmation
- Certified by all major SIP PBXs
- Compliant with RoHS, CE, FCC, UKCA, and VOC Standards



VoIP Corded	Part Number
V100IPLBY/Black	VV10N0L
V100IPMWS/Black	VV110S0D
V100IPMWD1/Black	VV110S1D
V100IPMWD3/Black	VV110S3D
V100IPMWD5/Black	VV110S5D
V100IPMWD/Black	VV110S10D
V100IPMWS/Black Silver	VV310S0D
V100IPMWD1/Black Silver	VV310S1D
V100IPMWD3/Black Silver	VV310S3D
V100IPMWD5/Black Silver	VV310S5D
V100IPMWD/Black Silver	VV310S10D
Analog Cordless 1.9GHz	**Part Number**
V103MWD1/Black	VA111319S1D
V103MWD3/Black	VA11319S3D
V103MWD5/Black	VA11319S5D
V103MWD/Black	VA11319S10D
V103MWD1/Black Silver	VA31319S1D
V103MWD3/Black Silver	VA31319S3D
V103MWD5/Black Silver	VA31319S5D
V103MWD/Black Silver	VA31319S10D
Analog Cordless 1.8GHz	**Part Number**
V103MWD1/Black	VA11318S1D
V103MWD3/Black	VA11318S3D
V103MWD5/Black	VA11318S5D
V103MWD/Black	VA11318S10D
V103MWD1/Black Silver	VA31318S1D
V103MWD3/Black Silver	VA31318S3D
V103MWD5/Black Silver	VA31318S5D
V103MWD/Black Silver	VA31318S10D
Analog Cordless 2.4GHz	**Part Number**
V103MWD1/Black	VA11324S1D
V103MWD3/Black	VA11324S3D
V103MWD5/Black	VA11324S5D
V103MWD/Black	VA11324S10D
V103MWD1/Black Silver	VA31324S1D
V103MWD3/Black Silver	VA31324S3D
V103MWD5/Black Silver	VA31324S5D
V103MWD/Black Silver	VA31324S10D
VoIP Cordless 1.9GHz	**Part Number**
V103MWD1/Black	VV111319S1D3
V103MWD3/Black	VV11319S3D3
V103MWD5/Black	VV11319S5D3
V103MWD/Black	VV11319S10D3
V103MWD1/Black Silver	VV31319S1D3
V103MWD3/Black Silver	VV31319S3D3
V103MWD5/Black Silver	VV31319S5D3
V103MWD/Black Silver	VV31319S10D3
VoIP Cordless 1.8GHz	**Part Number**
V103MWD1/Black	VV11318S1D3
V103MWD3/Black	VV11318S3D3
V103MWD5/Black	VV11318S5D3
V103MWD/Black	VV11318S10D3
V103MWD1/Black Silver	VV31318S1D3
V103MWD3/Black Silver	VV31318S3D3
V103MWD5/Black Silver	VV31318S5D3
V103MWD/Black Silver	VV31318S10D3
VoIP Cordless 2.4GHz	**Part Number**
V103MWD1/Black	VV11324S1D
V103MWD3/Black	VV11324S3D
V103MWD5/Black	VV11324S5D
V103MWD/Black	VV11324S10D
V103MWD1/Black Silver	VV31324S1D
V103MWD3/Black Silver	VV31324S3D
V103MWD5/Black Silver	VV31324S5D
V103MWD/Black Silver	VV31324S10D
Cordless Handset Kit - Analog	**Part Number**
V103HDKIT/Black 1.9GHz	VA11319S0HK
V103HDKIT/Black 1.8GHz	VA11318S0HK
V103HDKIT/Black 2.4GHz	VA11324S0HK
V103IPHDKIT/Black Silver 1.9GHz	VA31319S0HK
V103IPHDKIT/Black Silver 1.8GHz	VA31318S0HK
V103IPHDKIT/Black Silver 2.4GHz	VA31324S0HK
Cordless Handset Kit - VoIP	**Part Number**
V103IPHDKIT/Black 1.9GHz	VV11319S0HK3
V103IPHDKIT/Black 1.8GHz	VV11318S0HK3
V103IPHDKIT/Black 2.4GHz	VV11324S0HK3
V103IPHDKIT/Black Silver 1.9GHz	VV31319S0HK3
V103IPHDKIT/Black Silver 1.8GHz	VV31318S0HK3
V103IPHDKIT/Black Silver 2.4GHz	VV31324S0HK3
Cordless Handset Analog	**Part Number**
Handset Analog Black 1.9GHz	VA11319S0H
Handset Analog Black 1.8GHz	VA11318S0H
Handset Analog Black 2.4GHz	VA11324S0H
Handset Analog Black Silver 1.9GHz	VA31319S0H
Handset Analog Black Silver 1.8GHz	VA31318S0H
Handset Analog Black Silver 2.4GHz	VA31324S0H
Cordless Handset VoIP	**Part Number**
Handset VoIP 1.9GHz Black	VV11319S0H3
Handset VoIP 1.8GHz Black	VV11318S0H3
Handset VoIP 2.4GHz Black	VV11324S0H3
Handset VoIP 1.9GHz Black Silver	VV31319S0H3
Handset VoIP 1.8GHz Black Silver	VV31318S0H3
Handset VoIP 2.4GHz Black Silver	VV31324S0H3
Corded Handset - Analog & VoIP	**Part Number**
V-Series Handset Analog & VoIP Black	VB10N0H

Teledex E-Series









Specifications

Footprint Desk: 8" x 4.5" x 3.63"
Footprint Wall: 8" x 4.5" x 1.5"
Weight VoIP: 2lbs. (900g)
Weight Analog: 1.4lbs. (635g)
ETrim/RediDock Weight (Analog): 10oz.
ETrim/Redidock Weight (VoIP): 12oz.
Frequency (Cordless): 1.8GHz & 1.9GHz
Power (VoIP): Power over Ethernet 802.3af Compliant
Power (Analog): Wall adapter (USB/Cordless) Line (Corded)
Power (Handset Kit): Remote charging station includes handset w/ battery & AC adapter
Operating Voltage (Analog): 24-56 VDC Non-Polarity
Standby Time (Cordless): 10 days
Talk Time (Cordless): 6 hours
Range (Cordless): 100ft (30m)
Temperature: 77°F ± 50° | **Humidity:** 65% ± 20%
FCC Specifications (VoIP): FCC Part 15 Support B: 2009
FCC Specifications (Analog): Meets or exceeds Part 68, FCC Part 15 & UL 1459 Ref.
Safety Standard: UL - 60950–2nd edition ADA/HAC
RFCs (VoIP):3261 (SIP), 3842(SIP Subscribe), 2833 (SIP Info)
Flash Timing (Analog): 600ms
Handset Coil-Cord: 10ft (3.05m)
Line Cord: RJ11 (1-line) RJ14 (2-line) line cord - 12ft (3.66m)
Line Cord (Cordless & IP): RJ45 line cord - 12ft (3.66m)
Packaging: 10 per carton | **RediDock:** 10 per carton
Packaging ETrim: 20 per carton

Small is the New Big

Micro-footprint Teledex E Series phones have created an entirely new hotel guest room telephone category. Originally designed to meet the limited space requirements aboard cruise ships, E Series phones require less room on the hotel guest room desk and nightstand, and consume less energy in the manufacturing process, so the impact on the environment is smaller as well. Available in single and two-line, analog, VoIP, corded, and cordless configurations.

Design & Functionality

- Single or 2-line speakerphones
- Patented OneTouch voicemail retrieval
- Dual Neon/LED message-waiting light
- Electronic 3-way conference (2-line models)
- LED indicators for speaker, mute, line 1 & line 2 keys
- Up to 12 configurable guest service keys
- Dual port (10/100) for HSIA (VoIP)
- ETrim available (Corded)
- RediDock available (Cordless)
- Available Frequencies: 1.8GHz & 1.9GHz
- Supports up to 5 handsets (one on base, four remotes)
- HAC/VCH (ADA) compliant handset volume boost
- Optional alarm clock



VoIP Cordless 1.9GHz	Part Number
E103IP – 4GSK, 1L, MW, Spkr	EV11319S4D3
E103IP – 5GSK, 1L, MW, Spkr	EV11319S5D3
E103IP – 7GSK, 1L, MW, Spkr	EV11319S7D3
E103IP – RediDock, 1L, USB	EV11319N0HKU3
E203IP – 4GSK, 2L, MW, Spkr	EV12319S4D3
E203IP – 5GSK, 2L, MW, Spkr	EV12319S5D3
E203IP – 7GSK, 2L, MW, Spkr	EV12319S7D3
E203IP – RediDock, 2L, USB	EV12319N0HKU3
VoIP Cordless 1.8GHz	**Part Number**
E103IP – 4GSK, 1L, MW, Spkr	EV11318S4D3
E103IP – 5GSK, 1L, MW, Spkr	EV11318S5D3
E103IP – 7GSK, 1L, MW, Spkr	EV11318S7D3
E103IP – RediDock, 1L, USB	EV11318N0HKU3
E203IP – 4GSK, 2L, MW, Spkr	EV12318S4D3
E203IP – 5GSK, 2L, MW, Spkr	EV12318S5D3
E203IP – 7GSK, 2L, MW, Spkr	EV12318S7D3
E203IP – RediDock, 2L, USB	EV12318N0HKU3
Analog Cordless 1.9GHz	**Part Number**
E103 – 4GSK, 1L, MW, Spkr	EA011319S04D
E103 – 5GSK, 1L, MW, Spkr	EA011319S05D
E103 – 8GSK, 1L, MW, Spkr	EA011319S08D
E103 – 10GSK, 1L, MW, Spkr	EA011319S10D
E103 – 12GSK, 1L, MW, Spkr	EA011319S12D
E103 – RediDock, 1L, USB	EA11319N0HKU
E203 – 4GSK, 2L, MW, Spkr	EA012319S04D
E203 – 5GSK, 2L, MW, Spkr	EA012319S05D
E203 – 7GSK, 2L, MW, Spkr	EA012319S08D
E203 – 10GSK, 2L, MW, Spkr	EA012319S10D
E203 – 12GSK, 2L, MW, Spkr	EA012319S12D
E203 – RediDock, 2L, USB	EA12319N0HKU
Analog Cordless 1.8GHz	**Part Number**
E103 – 4GSK, 1L, MW, Spkr	EA011318S04D
E103 – 5GSK, 1L, MW, Spkr	EA011318S05D
E103 – 8GSK, 1L, MW, Spkr	EA011318S08D
E103 – 10GSK, 1L, MW, Spkr	EA011318S10D
E103 – 12GSK, 1L, MW, Spkr	EA011318S12D
E103 – RediDock, 1L, USB	EA11318N0HKU
E203 – 4GSK, 2L, MW, Spkr	EA012318S04D
E203 – 5GSK, 2L, MW, Spkr	EA012318S05D
E203 – 7GSK, 2L, MW, Spkr	EA012318S08D
E203 – 10GSK, 2L, MW, Spkr	EA012318S10D
E203 – 12GSK, 2L, MW, Spkr	EA012318S12D
E203 – RediDock, 2L, USB	EA12318N0HKU
VoIP Corded	**Part Number**
E100IP – Lobby 1L	EV10N0L3
E100IP – Basic 1L, Spkr	EV011000S00T3
E100IP – 4GSK 1L, MW, Spkr	EV110S4D3
E100IP – 5GSK 1L, MW, Spkr	EV110S5D3
E100IP – 7GSK 1L, MW, Spkr	EV110S7D3
E100IP – ETrim 1L, Trimline	EV110N0T3
E200IP – Basic 2L, Spkr	EV012000S00T3
E200IP – 4GSK 2L, MW, Spkr	EV120S4D3
E200IP – 5GSK 2L, MW, Spkr	EV120S5D3
E200IP – 7GSK 2L, MW, Spkr	EV120S7D3
E200IP – ETrim 2L, Trimline	EV120N0T3
Analog Corded	**Part Number**
E100 – Lobby 1L	EA011000N00L
E100 – Basic 1L, Spkr	EA011000S00T
E100 – 4GSK 1L, MW, Spkr	EA011000S04D
E100 – 5GSK 1L, MW, Spkr	EA011000S05D
E100 – 8GSK 1L, MW, Spkr	EA011000S08D
E100 – 10GSK 1L, MW, Spkr	EA011000S10D
E100 – 12GSK 1L, MW, Spkr	EA011000S12D
E100 – ETrim 1L, Trimline	EA110N0T
E200 – Basic 2L, Spkr	EA012000S00T
E200 – 4GSK 2L, MW, Spkr	EA012000S04D
VoIP Cordless 1.8GHz (USB)	**Part Number**
E103IP – 4GSK, 1L, MW, USB, Spkr	EV11318S4DU3
E103IP – 5GSK, 1L, MW, USB, Spkr	EV11318S5DU3
E103IP – 7GSK, 1L, MW, USB, Spkr	EV11318S7DU3
E103IP – RediDock, 1L, USB	EV11318N0HKU3
E203IP – 4GSK, 2L, MW, USB, Spkr	EV12318S4DU3
E203IP – 5GSK, 2L, MW, USB, Spkr	EV12318S5DU3
E203IP – 7GSK, 2L, MW, USB, Spkr	EV12318S7DU3
E203IP – RediDock, 2L, USB	EV12318N0HKU3
Analog Cordless 1.9GHz (USB)	**Part Number**
E103 – 4GSK, 1L, MW, USB, Spkr	EA11319S4DU
E103 – 5GSK, 1L, MW, USB, Spkr	EA11319S5DU
E103 – 8GSK, 1L, MW, USB, Spkr	EA11319S8DU
E103 – 10GSK, 1L, MW, USB, Spkr	EA11319S10DU
E103 – 12GSK, 1L, MW, USB, Spkr	EA11319S12DU
E103 – RediDock, 1L, USB	EA11319N0HKU
E203 – 4GSK, 2L, MW, USB, Spkr	EA12319S4DU
E203 – 5GSK, 2L, MW, USB, Spkr	EA12319S5DU
E203 – 7GSK, 2L, MW, USB, Spkr	EA12319S8DU
E203 – 10GSK, 2L, MW, USB, Spkr	EA12319S10DU
E203 – 12GSK, 2L, MW, USB, Spkr	EA12319S12DU
E203 – RediDock, 2L, USB	EA12319N0HKU
Analog Cordless 1.8GHz (USB)	**Part Number**
E103 – 4GSK, 1L, MW,USB, Spkr	EA11318S4DU
E103 – 5GSK, 1L, MW, USB, Spkr	EA11318S5DU
E103 – 8GSK, 1L, MW, USB, Spkr	EA11318S8DU
E103 – 10GSK, 1L, MW, USB, Spkr	EA11318S10DU
E103 – 12GSK, 1L, MW, USB, Spkr	EA11318S12DU
E103 – RediDock, 1L, USB	EA11318N0HKU
E203 – 4GSK, 2L, MW, USB, Spkr	EA12318S4DU
E203 – 5GSK, 2L, MW, USB, Spkr	EA12318S5DU

CE FC

Features and specifications are subject to change without notice. The values for mass and dimension are approximate.

Teledex M-Series









Specifications

Footprint: 8.56" x 5.8" x 3.64"
Weight: 3.3lbs. (1527g)
Power Supply: Remote charging station includes handset w/ battery & AC adapter
Operating Voltage: 24-56 VDC Non-Polarity
Humidity: 65% ± 20%
Temperature: 77°F ± 50° (25°C ± 10°C)
FCC Specifications (VoIP): FCC Part 15 Support B: 2009
FCC Specifications (Analog): Meets or exceeds Part 68, FCC Part 15 & UL 1459 Ref.
Safety Standard: UL - 60950–1 2nd edition ADA/HAC
Ringer Equivalence: Z (Use only behind PBX)
Flash Timing (Analog): 600ms
Handset Coil-Cord: 10ft (3.048m)
Line Cord: RJ11 (1-Line) RJ14 (2-Line) line cord - 12ft
Line Cord (VoIP): RJ45 Line Cord - 12ft (3.66m)
Packaging: 10 per carton

More Than Just a Telephone

M Series analog and VoIP corded and cordless phones gives guests the ability to charge smart devices via USB charging. An optional high performance stereo sound system replaces stand-alone audio playback devices in the room to save space, and empower enhanced speakerphone calls and conferencing. Available with 5 or 10 programmable guest service keys, patented OneTouch voicemail retrieval and customizeable faceplate.

Design & Functionality

- Single or 2-line
- Speakerphone available
- Up to 10 programmable guest service keys
- Patented OneTouch voicemail retrieval
- Dual Neon/LED message-waiting light
- Electronic 3-way conferencing (2-line models)
- Dual port (10/100) for HSIA (VoIP)
- HAC/VCH (ADA) compliant handset volume boost
- Fully customizeable faceplate
- Available frequencies: 1.8 GHz & 1.9GHz
- RediDock available (VoIP)
- Handset Kits available (Analog)
- 2 high-current USB charging ports support devices up to 2.1 Amp
- Optional alarm clock



Single-Line VoIP 1.9GHz Cordless	Part Number
M103IP5 (5GSK, Spkr)	MV11319S5DU3
M103IP53 (5/3GSK, Spkr)	MV11319S53DU3
M103IP56 (5/6GSK, Spkr)	MV11319S56DU3
M103IP10 (10GSK, Spkr)	MV11319S10DU3
M103IP103 (10/3GSK, Spkr)	MV11319S103DU3
M103IP106 (10/6GSK, Spkr)	MV11319S106DU3
M103IPHDKT (0GSK, Spkr) RediDock	MV11319SHKU3
M1033IPHDKT (3GSK, Spkr) RediDock	MV11319S3HKU3
M1036IPHDKT (6GSK, Spkr) RediDock	MV11319S6HKU3
Two-Line VoIP 1.9GHz Cordless	**Part Number**
M203IP5 (5GSK, Spkr)	MV12319S5DU3
M203IP53 (5/3GSK, Spkr)	MV12319S53DU3
M203IP56 (5/6GSK, Spkr)	MV12319S56DU3
M203IP10 (10GSK, Spkr)	MV12319S10DU3
M203IP103 (10/3GSK, Spkr)	MV12319S103DU3
M203IP106 (10/6GSK, Spkr)	MV12319S106DU3
M203IPHDKT (0GSK, Spkr) RediDock	MV12319SHKU3
M2033IPHDKT (3GSK, Spkr) RediDock	MV12319S3HKU3
M2036IPHDKT (6GSK, Spkr) RediDock	MV12319S6HKU3
Single-Line VoIP 1.8GHz Cordless	**Part Number**
M103IP5 (5GSK, Spkr)	MV11318S5DU3
M103IP53 (5/3GSK, Spkr)	MV11318S53DU3
M103IP56 (5/6GSK, Spkr)	MV11318S56DU3
M103IP10 (10GSK, Spkr)	MV11318S10DU3
Two-Line VoIP 1.8GHz Cordless	**Part Number**
M203IP5 (5GSK, Spkr)	MV12318S5DU3
M203IP53 (5/3GSK, Spkr)	MV12318S53DU3
M203IP56 (5/6GSK, Spkr)	MV12318S56DU3
M203IP10 (10GSK, Spkr)	MV12318S10DU3
M203IP103 (10/3GSK, Spkr)	MV12318S103DU3
M203IP106 (10/6GSK, Spkr)	MV12318S106DU3
M203IPHDKT (0GSK, Spkr) RediDock	MV12318SHKU3
M2033IPHDKT (3GSK, Spkr) RediDock	MV12318S3HKU3
M2036IPHDKT (6GSK, Spkr) RediDock	MV12318S6HKU3
Single-Line Analog 1.9GHz Corldess	**Part Number**
M1035 (5GSK, Spkr)	MA1319S5D
M10353 (5/3GSK, Spkr)	MA1319S53D
M10356 (5/6GSK, Spkr)	MA1319S56D
M10310 (10GSK, Spkr)	MA1319S10D
M103103 (10/3GSK, Spkr)	MA1319S103D
M103106 (10/6GSK, Spkr)	MA1319S106D
M103HDKT (0GSK, Spkr) RediDock	MA1319SHK
M1033HDKT (3GSK, Spkr) RediDock	MA1319S3HK
M1036HDKT (6GSK, Spkr) RediDock	MA1319S6HK
Two-Line Analog 1.9GHz Cordless	**Part Number**
M2035 (5GSK, Spkr)	MA2319S5D
M20353 (5/3GSK, Spkr)	MA2319S53D
M20356 (5/6GSK, Spkr)	MA2319S56D
M20310 (10GSK, Spkr)	MA2319S10D
M203103 (10/3GSK, Spkr)	MA2319S103D
M203106 (10/6GSK, Spkr)	MA2319S106D
M203HDKT (0GSK, Spkr) RediDock	MA2319SHK
M2033HDKT (3GSK, Spkr) RediDock	MA2319S3HK
M2036HDKT (6GSK, Spkr) RediDock	MA2319S6HK
Single-Line Analog 1.8GHz Cordless	**Part Numbers**
M1035 (5GSK, Spkr)	MA1318S5D
M10353 (5/3GSK, Spkr)	MA1318S53D
M10356 (5/6GSK, Spkr)	MA1318S56D
M10310 (10GSK, Spkr)	MA1318S10D
M103103 (10/3GSK, Spkr)	MA1318S103D
M103106 (10/6GSK, Spkr)	MA1318S106D
M103HDKT (0GSK, Spkr) RediDock	MA1318SHK
M1033HDKT (3GSK, Spkr) RediDock	MA1318S3HK
M1036HDKT (6GSK, Spkr) RediDock	MA1318S6HK
Single-Line VoIP Corded	**Part Number**
M100IPLBY	MV10N0L3
M100IP5 (5GSK, Spkr)	MV110S5DU3
M100IP10 (10GSK, Spkr)	MV110S10DU3
M100IPTRM Trimline	MV110N0T3
Single-Line Analog Corded	**Part Number**
M100LBY	MA10N0L
M1005 (5GSK, Spkr)	MA10S5D
M10010 (10GSK, Spkr)	MA10S10D
M100TRM Trimline	MA10NT
Two-Line Analog 1.8GHz Cordless	**Part Number**
M2035 (5GSK, Spkr)	MA2318S5D
M20353 (5/3GSK, Spkr)	MA2318S53D
M20356 (5/6GSK, Spkr)	MA2318S56D
M20310 (10GSK, Spkr)	MA2318S10D
M203103 (10/3GSK, Spkr)	MA2318S103D
M203106 (10/6GSK, Spkr)	MA2318S106D
M203HDKT (0GSK, Spkr) RediDock	MA2318SHK
M2033HDKT (3GSK, Spkr) RediDock	MA2318S3HK
M2036HDKT (6GSK, Spkr) RediDock	MA2318S6HK
M2005 (5GSK, Spkr, Bluetooth)	MA20S5DB
M20010 (10GSK, Spkr, Bluetooth)	MA20S10DB
Two-Line VoIP Corded	**Part Number**
M200IP5 (5GSK, Spkr)	MV120S5DU3
M200IP10 (10GSK, Spkr)	MV120S10DU3
M200IPTRM Trimline	MV120N0T3
Two-Line Analog Corded	**Part Number**
M2005 (5GSK, Spkr)	MA20S5D
M20010 (10GSK, Spkr)	MA20S10D
M200TRM Trimline	MA20NT
M1005 (5GSK, Spkr, BT)	MA10S5DB
M10010 (10GSK, Spkr, BT)	MA10S10DB

CE FC

Features and specifications are subject to change without notice. The values for mass and dimension are approximate.

Teledex I-Series









Specifications

Footprint Desk: 9" x 6" x 3.375" | **Wall:** 9" x 6" x 3.5"
Footprint RediDock/Trimline: 8.25" x 2.75" x 3.38"
Weight: 1.8lbs. (810g) | **Redidock/Trimline:** 0.8lbs.
Frequency (Cordless): 1.8GHz & 1.9GHz
Power: Line (Corded)/12VDC Adapter (Cordless)
Power (Cordless): Remote charging station includes handset w/ battery & AC adapter
Operating Voltage: 24-56 VDC Non-Polarity
Standby Time (Cordless): 14 days
Talk Time (Cordless): 6 hours
Range (Cordless): 100ft (30m)
Flash Timing: 100ms-1000ms
Ringer Equivalence: Z (Use only behind PBX)
Temperature: 77°F ± 50° (25°C ± 10°C)
Humidity: 65% ± 20%
FCC Specifications: Meets or exceeds Part 15, Subpart J, Class A, Part 68
Safety Standard: ETL & CE
Registered Connector (Corded): USOC RJ-14
Handset Coil-Cord: 10ft (3.048m)
Line Cord: RJ11 (1-Line) RJ14 (2-Line) line cord - 12ft
Line Cord (Cordless): RJ45 Line Cord - 12ft (3.66m)
Packaging: 10 per carton
Packaging (RediDock): 10 per carton
Packaging (Trimline): 20 per carton

Small Footprint. Elegant Lines.

Designed to embrace the sleek style of the modern hotel guest room, I Series hotel phones provide a familiar user interface for your guests in your choice of single and twoline, analog corded and cordless configurations. Choose 0, 3, 5, or 10 programmable guest service keys, an optional speakerphone, and our patented OneTouch voicemail retrieval technology.

I Series cordless telephones reduce or eliminate the need for multiple telephone jacks in the guestroom, supporting up to 3 additional AC-powered RediDock charging stations, and providing guests with a cordless home-like environment.

Design & Functionality

- Single or 2-line
- Optional Speakerphone
- RediDock & Trimline models available
- Patented OneTouch voicemail retrieval with bright message waiting indicator
- Up to 10 programmable guest service keys
- Optional battery backup (Analog Cordless)
- Full-length customizeable faceplate
- Desk or wall mountable
- Electronic 3-way conferencing (2-Line phones)
- ADA-compliant volume control with enhanced Sonica™ hearing aid capability
- Flash, hold, mute, conference, redial keys
- PrimeLine/RingLine™ automatic line selection
- Supports up to 5 handsets, including one on the base and four remotes (RediDock kits)
- AutoSync automatically syncs handset with base when in cradle
- VoIP based protocol; SIP RFC 3261 compliant
- Codecs supported: G711a; G711μ; G729
- Supports 802.1Q VLAN tagging
- 2-port 10/100 Ethernet switch
- Supports DCP or Static IP address
- Positive charge indicator (Cordless)

Single-Line Analog 1.9GHz Cordless	Part Number
AC9105S (5-GSK spkr)	IPN964591(Blk) IPN96459(Ash)
AC9110S (10-GSK spkr)	IPN965591(Blk) IPN96559(Ash)
RediDock (Single-line)	IPN965591HDKIT(Blk) IPN96559HDKIT(Ash)
Single-Line Analog 1.8GHz Cordless	**Part Number**
AC8105S (5-GSK spkr)	IPN962591(Blk) IPN96259(Ash)
AC8110S (10-GSK spkr)	IPN963591(Blk) IPN96359(Ash)
RediDock (Single-line)	IPN963591HDKIT(Blk) IPN96359HDKIT(Ash)
Two-Line Analog 1.9GHz Cordless	**Part Number**
AC9205S 5-GSK spkr)	IPN984591(Blk) IPN98459(Ash)
AC9210S 10-GSK spkr)	IPN985591(Blk) IPN98559(Ash)
RediDock (Single-line)	IPN985591HDKIT(Blk) IPN98559HDKIT(Ash)
Two-Line Analog 1.8GHz Cordless	**Part Number**
AC8205S (5-GSK spkr)	IPN982591(Blk) IPN98259(Ash)
AC8210S (10-GSK spkr)	IPN983591(Blk) IPN98359(Ash)
RediDock (Single-line)	IPN983591HDKIT(Blk) IPN98359HDKIT(Ash)

Single-Line Analog Corded	Part Number
A101 (Lobby)	IPN330091(Blk) / IPN33009(Ash)
A100 (Basic)	IPN333091(Blk) / IPN33309(Ash)
A102 (Basic)	IPN330391(Blk) / IPN33039(Ash)
A103 (3-GSK)	IPN337391(Blk) / IPN33739(Ash)
A105 (5-GSK)	IPN331391(Blk) / IPN33139(Ash)
A110 (10-GSK)	IPN332391(Blk) / IPN33239(Ash)
A100s (Basic spkr)	IPN330491(Blk) / IPN33049(Ash)
A103s (3-GSK spkr)	IPN337491(Blk) / IPN33749(Ash)
A105S (5-GSK spkr)	IPN331491(Blk) / IPN33149(Ash)
A110S (10-GSK spkr)	IPN333391(Blk) / IPN33339(Ash)
Two-Line Analog Corded	**Part Number**
A200s (Basic spkr)	IPN340491(Blk) / IPN34049(Ash)
A203s (3-GSK spkr)	IPN347491(Blk) / IPN34749(Ash)
A205S (5-GSK spkr)	IPN341491(Blk) / IPN34149(Ash)
A210S (10-GSK spkr)	IPN343591(Blk) / IPN34359(Ash)
I-Series Trimline (1-Line)	**Part Number**
AT1101 NO/MW	IPN330191(Blk) / IPN33019(Ash)
AT1102 W/MW	IPN331191(Blk) / IPN33119(Ash)
I-Series Trimline 2 (2-Line)	**Part Number**
AT1201 NO/MW	IPN340591(Blk) / IPN34059(Ash)
AT1202 W/MW	IPN341591(Blk) / IPN34159(Ash)

Single-Line VoIP 1.9GHz Cordless	Part Number
NDC2105S (5GSK Spkr)	IV11319S5D3(Blk) IV21319S5D3(Ash)
NDC2110S (10GSK Spkr)	IV11319S10D3(Blk) IV21319S10D3(Ash)
IRD9110 RediDock	IV11319N0HK3(Blk) IV21319N0HK3(Ash)
Two-Line VoIP 1.9GHz Cordless	**Part Number**
NDC2205S (5GSK Spkr)	IV12319S5D3(Blk) IV22319S5D3(Ash)
NDC2210S (10GSK Spkr)	IV12319S10D3(Blk) IV22319S10D3(Ash)
IRD9210 RediDock	IV12319N0HK3(Blk) IV22319N0HK3(Ash)
Single-Line VoIP 1.8GHz Cordless	**Part Number**
NDC2105S (5GSK Spkr)	IV11318S5D3(Blk) IV21318S5D3(Ash)
NDC2110S (10GSK Spkr)	IV11318S10D3(Blk) IV21318S10D3(Ash)
IRD8110 RediDock	IV11318N0HK3
Two-Line VoIP 1.8GHz Cordless	**Part Number**
NDC2205S (5GSK Spkr)	IV12318S5D3(Blk) IV22318S5D3(Ash)
NDC2210S (10GSK Spkr)	IV12318S10D3(Blk) IV22318S10D3(Ash)
IRD8210 RediDock	IV12318N0HK3(Blk) IV22318N0HK3(Ash)

Single-Line VoIP Corded	Part Number
ND2105S (5GSK Spkr)	IV110S5D3(Blk)/IV210S5D3
ND2110S (10GSK Spkr)	IV110S10D3(Blk) IV210S10D3(Ash)
Two-Line VoIP Corded	**Part Number**
ND2205S (5GSK Spkr)	IV120S5D3(Blk)/IV220S5D3
ND2210S (10GSK Spkr)	IV120S10D3(Blk) IV220S10D(Ash)



Features and specifications are subject to change without notice. The values for mass and dimension are approximate.

Teledex Diamond Series

Color Options:









The Worlds Most Popular Hotel Phone

This is the phone that started it all. With over 5 million in service worldwide, this corded analog phone is available in single or two-line models, with up to 10 programmable guest service keys, patented OneTouch voicemail retrieval technology, and an optional speakerphone.
Diamond Series hotel telephones, like all Teledex products, are thoughtfully designed to last for years in the demanding hospitality environment. Expect to see this model in hotel rooms for years to come.

Design & Functionality

- One and two-line analog telephones
- Optional speakerphone
- Patented OneTouch voicemail retrieval
- Message-waiting light
- 0, 3, 5 or 10 guest service keys
- Full-length customizable faceplate
- Desk or wall mountable
- Integrated Speakerphone–Hands-free conversations
- ADA Handset Volume Boost – Three distinct levels, compliant with HAC/VC and FCC requirements
- Mute, Hold, Redial, Flash (most models) keys
- Speaker On/Off Key – With red LED for easy speakerphone activation
- Electronic 3-way Call Conference Function with LED indicator for multi-line conversations (2-line)
- Hold Release Detection Circuit – Releases calls on hold when line is accessed by any telephone
- Textured Finish – Provides durable resistance against scratches and smudges
- Hidden Programming Key

Specifications

Footprint: 9.5" x 6.25" x 3.75"
Weight: 1.8lbs.
Power: Line
Operating Voltage: 24-56 VDC Non-Polarity
Flash Timing: 100ms-1000ms
Signaling: Standard 12 tone DTMF, no Pulse/Rotary
Ringer Equivalence: Z (Use only behind PBX)
Registered Connector: USOC RJ-14
Cabling: 2 pair minimum
Handset: Hearing air compatible /Standard "K" type
Humidity: 65% ± 20%
Temperature: 77°F ± 50° (25°C ± 10°C)
FCC Specifications: Meets or exceeds Part 15, Subpart J, Class A, Part 68
Safety Standard: ETL & CE
Line Cord: 12 ft. RJ11 (1-Line) RJ14 (2-Line) line cord
Packaging: 10 per carton



Single Line Phone	Part Number
Diamond Lobby	DIA65009 (Ash) / DIA650091 (Blk)
Diamond Basic	DIA65309 (Ash) / DIA653091 (Blk)
Diamond +3	DIA65739 (Ash) / DIA657391 (Blk)
Diamond +5	DIA65139 (Ash) / DIA651391 (Blk)
Diamond +10	DIA65239 (Ash) / DIA652391 (Blk)
Diamond +S-3	DIA65749 (Ash) / DIA657491 (Blk)
Diamond +S-5	DIA65149 (Ash) / DIA651491 (Blk)
Diamond +S-10	DIA65339 (Ash) / DIA653391 (Blk)
Diamond +S	DIA65049 (Ash) / DIA650491 (Blk)

Two-Line Phone	Part Number
Diamond L2-E	DIA67059 (Ash) / DIA670591 (Blk)
Diamond L2-5E	DIA67159 (Ash) / DIA671591 (Blk)
Diamond L2-10E	DIA67259 (Ash) / DIA672591 (Blk)
Diamond L2S-5E	DIA67149 (Ash) / DIA671491 (Blk)
Diamond L2S-10E	DIA67359 (Ash) / DIA673591 (Blk)

CE FC

Features and specifications are subject to change without notice. The values for mass and dimension are approximate.

Teledex D-Series

Color Options:









Specifications

Footprint: 9.5" x 6.25" x 3.75"
Weight: 1.9lbs.
Power: Line
Operating Voltage: 24-56 VDC Non-Polarity
Flash Timing: 100ms-1000ms
Signaling: Standard 12 tone DTMF, no Pulse/Rotary
Ringer Equivalence: Z (Use only behind PBX)
Registered Connector: USOC RJ-14
Cabling: 2 pair minimum
Handset: Hearing air compatible/Standard "K" type
Humidity: 65% ± 20%
Temperature: 77°F ± 50° (25°C ± 10°C)
FCC Specifications: Meets or exceeds Part 15, Subpart J, Class A, Part 68
Safety Standard: ETL & CE
Line Cord: 12 ft. RJ11 (1-Line) RJ14 (2-Line) line cord
Packaging: 10 per carton

The New Diamond

We began the development of Teledex D Series with a fresh new contemporary design, robust ergonomic open handset, and guest smart device USB charging ports, but maintained the same Diamond faceplate area so Diamond Series owners may easily upgrade with existing faceplates.

D Series sets the new standard in analog corded hotel phone telephony in single or two-line models with optional built-in USB charging ports, up to 10 programmable guest service keys, patented OneTouch voicemail retrieval technology, and optional speakerphone.

Design & Functionality

- One and two-line analog telephones
- Optional speakerphone
- Optional USB Charging Ports (2)
- Patented OneTouch voicemail retrieval & message-waiting light
- 0, 3, 5 or 10 guest service keys
- Full-length customizable faceplate
- Desk or wall mountable
- ADA Handset Volume Boost – Three (3) distinct levels, compliant with HAC/VC and FCC requirements
- Mute, Hold, Redial, Flash (most models) keys
- Speaker On/Off Key – With red LED for easy speakerphone activation
- Electronic 3-way Call Conference Function with LED indicator for convenient multi-line conversations (2-line only)
- Hold Release Detection Circuit – Releases calls on hold when line is accessed by any telephone
- Textured Finish – Provides durable resistance against scratches and smudges
- Hidden Programming Key – Eliminates arbitrary reprogramming of autodial keys



Single Line Phone	Part Number
D100 Lobby – 1L, 0GSK	DA210N0L(Ash) DA110N0L(Blk)
D100 Basic – 1L, 0GSK	DA210N0D(Ash) DA110N0D(Blk)
D1003 – 1L, 3 GSK	DA210N3D(Ash) DA110N3D(Blk)
D1005 – 1L, 5 GSK	DA210N5D(Ash) DA110N5D(Blk)
D10010 – 1L, 10 GSK	DA210N10D(Ash) DA110N10D(Blk)
D100S3 – 1L, 3 GSK, Spkr	DA210S3D(Ash) DA110S3D(Blk)
D100S5 – 1L, 5 GSK, Spkr	DA210S5D(Ash) DA110S5D(Blk)
D100S3U – 1L,3 GSK,Spkr,USB	DA210S3DU(Ash) DA110S3DU(Blk)
D100S5U – 1L,5 GSK,Spkr,USB	DA210S5DU(Ash) DA110S5DU(Blk)
D100S10U – 1L,10 GSK,Spkr,USB	DA210S10DU(Ash) DA110S10DU(Blk)
D100S10 – 1L, 10 GSK, Spkr	DA210S10D(Ash) DA110S10D(Blk)

Two-Line Phone	Part Number
D200L2E – 2L, 0GSK	DA220N0D(Ash) DA120N0D(Blk)
D200L25E – 2L, 5 GSK	DA220N5D(Ash) DA120N5D(Blk)
D200L210E – 2L, 10 GSK	DA220N10D(Ash) DA120N10D(Blk)
D200L2S5E – 2L, 5 GSK, Spkr	DA220S5D(Ash) DA120S5D(Blk)
D200L2S10E – 2L, 10 GSK, Spkr	DA220S10D(Ash) DA120S10D(Blk)
D200S5U – 2L,5 GSK,Spkr,USB	DA220S5DU(Ash) DA120S5DU(Blk)
D200S10U – 2L,10 GSK,Spkr,USB	DA220S10DU(Ash) DA120S10DU(Blk)

CE FC Features and specifications are subject to change without notice. The values for mass and dimension are approximate.

Teledex Opal Series

Color Options:









Specifications

Footprint: 9" x 6" x 3.38"
Operating Voltage: 24-56 VDC Non-Polarity
Ringer Equivalence: Z (Use only behind PBX)
Humidity: 65% ± 20% | **Temperature:** 77°F ± 50°
FCC Specifications: Meets or exceeds Part 15, Subpart J, Class A, Part 68
Safety Standard: ETL & CE
Packaging: 10 per carton

1900/2900/1800/2800 Specifications

Footprint (RediDock): 8.17" x 3.75" x 3.38"
Weight: 1.8lbs.(810g)
Weight (RediDock): 0.95lbs. (0.43kg)
Frequency (Cordless): 1.8GHz & 1.9GHz
Power: 9 VDC adapter
Standby Time: 14 days | **Talk Time (Cordless):** 4 Hours
Range (Cordless): 100ft (30m)
Flash Timing: 600ms
Line Cord: RJ45 line cord - 12ft (3.66m)

1000/2000 Series Specifications


Weight: 2lbs. (900g)
Power: Line
Flash Timing: 100ms-1000ms
Registered Connector: USOC RJ-14
Handset: Hearing Aid Compatible
Handset Coil-Cord: 10ft (3.048m)
Line Cord: RJ11 (1-Line) RJ14 (2-Line) line cord - 12ft
Cords & Line: 12ft/10ft coil

The New Diamond

Teledex Opal Series hotel phones have a modern, recognizable international design that compliments modern guest room decor.

Design & Functionality

- 1.8GHz & 1.9GHz DECT for best range, clarity & security
- 1 or 2 line configuration
- EZ-Answer connects to incoming call by ressing any key
- Superior quality speakerphone (optional) for hands free calling
- Supports up to 5 handsets, including one on the base and four remotes
- AutoSync – handset automatically syncs with base unit when in cradle
- Optional remote cordless handset battery backup
- Easy-access data port
- LifeLinePlus allows use during power failure
- Up to 11 configurable guest service keys
- Mute, Hold, Redial, Flash, Volume Boost keys
- Lighted handset keypad
- Handset page/locator
- Low battery & line status indicators
- Breaking-resistant, non-extending antenna
- Bright message waiting light and positive charge indicator.
- ADA compliant volume control

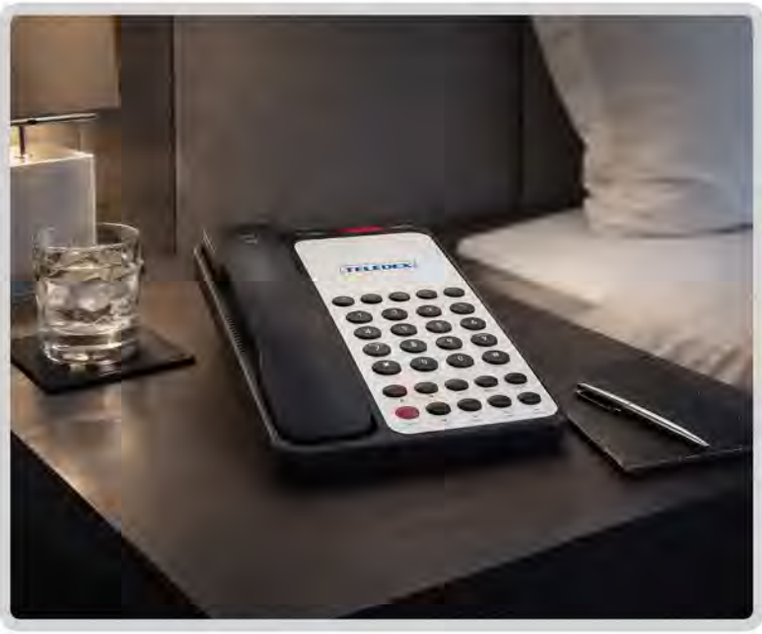

DECT 1.9GHz (Single-Line)	Part Number
Opal DCT1905	OPL951491(Blk) / OPL95149 (Ash)
Opal DCT1910	OPL953391(Blk) / OPL95339(Ash)
RediDock RD1910 (Single-line)	OPL953391HDKIT(Blk) OPL95339HDKIT(Ash)

DECT 1.9GHz (Two-Line)	Part Number
Opal DCT2905	OPL971491(Blk) / OPL97149(Ash)
Opal DCT2910	OPL973591(Blk) / OPL97359(Ash)
RediDock RD2910 (Two-line)	OPL973591HDKIT(Blk) OPL97359HDKIT(Ash)

DECT 1.8GHz (Single-Line)	Part Number
Opal DCT1805	OPL951481(Blk) / OPL95148(Ash)
Opal DCT1810	OPL953381(Blk) / OPL95338(Ash)
RediDock RD1910 (Single-line)	OPL953381HDKIT(Blk) OPL95338HDKIT(Ash)

DECT 1.8GHz (Single-line)	Part Number
Opal DCT2805	OPL971481(Blk) / OPL97148(Ash)
Opal DCT2810	OPL973581(Blk) / OPL97358(Ash)
RediDock RD2810 (Single-line)	OPL973581HDKIT(Blk) OPL97358HDKIT(Ash)

Single-Line Models	Part Number
Opal 1001 (Basic)	OPL760091 (Blk) OPL76009 (Ash)
Opal 1000 (Basic)	OPL763091 (Blk) OPL76309 (Ash)
Opal 1002 (Basic)	OPL760391 (Blk) OPL76039 (Ash)
Opal 1003 (3-GSK)	OPL767391 (Blk) OPL76739 (Ash)
Opal 1005 (5-GSK)	OPL761391 (Blk) OPL76139 (Ash)
Opal 1010 (10-GSK)	OPL762391 (Blk) OPL76239 (Ash)
Opal 1003s (3-GSK spkr)	OPL767491 (Blk) OPL76749 (Ash)
Opal 1005S (5-GSK spkr)	OPL761491 (Blk) OPL76149 (Ash)
Opal 1010S (10-GSK spkr)	OPL763391 (Blk) OPL76339 (Ash)

Two-Line Models	Part Numbers
Opal 2006 (6-GSK)	OPL780391 (Blk) OPL78039 (Ash)
Opal 2011 (11-GSK)	OPL782591 (Blk) OPL78259 (Ash)
Opal 2006s (6-GSK spkr)	OPL781491 (Blk) OPL78149 (Ash)
Opal 2011s (11-GSK spkr)	OPL783591 (Blk) OPL78359 (Ash)

Opal Trimline (Single-Line)	Part Number
NO MWL	OPL690191 (Blk) / OPL69019 (Ash)
With MWL	OPL691191(Blk) / OPL69119(Ash)

Opal Trimline 2 (Two-Line)	Part Number
NO MWL	OPL690591(Blk) / OPL69059(Ash)
With MWL	OPL691591(Blk) / OPL69159(Ash)

CE FC Features and specifications are subject to change without notice. The values for mass and dimension are approximate.

Teledex Nugget Series

Color Options:









Specifications

Footprint: 8.5″ x 5″ x 3″
Weight: 1.4lbs. (630g)
Power: Line
Operating Voltage: 24-56 VDC
Humidity: 65% ± 20%
Temperature: 77°F ± 50° (25°C ± 10°C)
FCCC Specifications: FCC Part 15 Support B: 2009
Safety Standard: ETL & CE
Handset: Hearing aid compatible (Standard or Euro type)
Coil-Cord: 10ft (3.048m)
Packaging: 10 per carton

Single-Line Phone	Part Number
NUGGET 3 SERIES	NUG31739(Ash) NUG317391(Blk)
NUGGET SERIES	NUG31039(Ash) NUG310391(Blk)

Designed for Tight Spaces & Tighter Bugets

No frills. No extras. Just a quality hotel phone that fits any budget and will leave extra room on your nightstand. Teledex Nugget Series hotel phones combine classic design, easy-to-use functionality, and rugged durability into a small footprint that makes a large impact.

Design & Functionality

- Single Line Telephones
- ADA Handset Volume Boost – HAC/VC and FCC compliant
- Data Port – Easy access for laptop modem or fax machine use
- Raised Red Message Waiting Lens – Easily seen from any area in the guestroom
- Paper Faceplate – Allows user-friendly customization
- Flash Function – Access to PBX functions
- Textured Finish resists scratches and smudges
- Stylish Euro Handset
- Desk or Wall Mountable

Nugget 3

- MultiX™ Message Waiting Circuitry – with an extra-bright message-waiting lamp
- Redial Key – Redials the last number dialed
- Hidden Programming Key – Eliminates arbitrary reprogramming of autodial keys
- 3 programmable guest service keys



Cetis®

Limited Time Product Guide Discount



Save Up to 35%

10% OFF
Cetis Appliances
orders of 25+ Units

Bundle More.
Save More.
Add 25+ units of a different Cetis product, get an additional 5% off each, plus FREE shipping within the continental US & Canada.

Restrictions Apply. Expires 12/31/2026.

CODE: CETIS-PG-26

Why Cetis?

We don't just sell products — we deliver the only unified family of in-room solutions in hospitality. Every Cetis appliance and phone is designed to complement the next, bringing cohesion to the guest room, strengthening brand consistency, and enhancing the overall guest experience.

Ready to Upgrade Your Guest Experience?

Contact Cetis to inquire or learn more today.

+1.719.638.8821 | info_USCA@Cetis.com | CetisGroup.com









Specifications

Footprint: 8" x 3.63" x 4.5"
Footprint (Trimline): 9.75" x 2.5" x 3.25"
Weight: VoIP 2lbs. (0.9kg)
Line Voltage: 24-56 VDC Non-Polarity
Line Current: 20mA-100mA Auto detect for 90 VDC Neon or Low Voltage LED
Certifications: FCC Part 68, FCC Part 15 & UL 1459 Ref. CE ETL
Compliance: ADA/FCC Hearing Aid Compliant RoHS Environmentally Compliant
Ringer Equivalence: 1.3dB
Max Power Output: 18.11dBm
Antenna Gain: 0dBi
Frequency Range (9600): 1.8GHz & 1.9GHz
Frequency Range (9400): 2.4GHz (2400-2480.544 MHz)
Handset: ADA/FCC Hearing Aid Compliant
Line Cord: RJ45 Line Cords–12ft (3.66m)
Line Cord (Analog): RJ14 Line Cord–12ft (3.66m)
Packaging: 10 per carton

Amazingly Exquisite! Functions Beyond Beautiful!

When you combine Telematrix's legendary performance with the style of our new 3500|9700 series hotel telephones, you get an elegant functionality that will fit into any of your hotel décors. The 3500|9700 series telephones are a perfect fit! To further match your hotel's décor, choose from any of 5 standard or custom color inserts. Functionality includes our patented OneTouch voice mail technology for hands-free auto-dialing and retrieval, and an integrated Ethernet pass-through port for guest connectivity (IP).

Design & Functionality

- Available in 1 or 2-line configurations
- Corded (3500) or Cordless (9700)
- Optional USB charging port
- Speakerphone or non-speakerphone
- 0, 3, 5 or 10 programmable Guest Service Keys
- Patented OneTouch voice mail retrieval technology
- Dual Neon / LED message-waiting light / SIP Standard voicemail messaging (VoIP phones)
- LED indicator for Speaker, Mute, & Hold keys, Line 1, Line 2 keys (2-line models only)
- 3-way conference calling (2-line models only)
- Industrial grade construction with matte finish
- Non-slip base
- Supports up to 4 handsets, including one on the base and 3 remotes (Cordless)
- HAC/VCH (ADA) compliant handset volume boost
- 3-way conference calling (2-Line Only)
- EasyAccess™ data port (Analog)
- Dual Port (10/100) for HSIA (VoIP)
- For an additional charge, choose from four insert color options to match your brand. For part numbers, add the following suffixes at the end of the cool gray or black part number:
  - Red = RED|Blue = BLU|Bronze = BRZ|Silver = SLV
  - Example: 3500MWD Black w/Red insert
    - 35A110S10DRED

CE FC

Features and specifications are subject to change without notice. The values for mass and dimension are approximate.

VoIP Cordless 1-Line Speakerphone	Part Number
9700IPMWD5 (5 GSK, USB)	97V51319S5DU3(Gr) 97V11319S5DU3 (Blk)
9700IPMWD (10 GSK, USB)	97V51319S10DU3(Gr) 97V11319S10DU3 (Blk)
9700IPMWD5 (5 GSK)	97V51319S5D3(Gr) 97V11319S5D3 (Blk)
9700IPMWD (10 GSK)	97V51319S10D3(Gr) 97V11319S10D3 (Blk)

VoIP Cordless 2-Line Speakerphone	Part Number
9702IPMWD5 (5 GSK, USB)	97V52319S5DU3(Gr) 97V12319S5DU3 (Blk)
9702IPMWD (10 GSK, USB)	97V52319S10DU3 (Gr) 97V12319S10DU3 (Blk)
9702IPMWD5 (5 GSK)	97V52319S5D3(Gr) 97V12319S5D3 (Blk)
9702IPMWD (10 GSK)	97V52319S10D3(Gr) 97V12319S10D3 (Blk)

VoIP Remote Handset Kits	Part number
1-Line:	97V51319S0HK3(ClGr) 97V11319S0HK3 (Blk)
1-Line (USB)	97V51319S0HKU3 (Gr) 97V11319S0HKU3 (Blk)
2 Line:	97V52319S0HK3 (Gr) 97V12319S0HK3 (Blk)
2 Line (USB)	97V52319S0HKU3(Gr) 97V12319S0HKU3 (Blk)

Analog Cordless 1-Line Speakerphone	Part Number
9700MWD5 (5 GSK, USB)	97A51319S5DU(Gr) 97A11319S5DU (Blk)
9700MWD (10 GSK, USB)	97A51319S10DU(Gr) 97A11319S10DU (Blk)
9700MWD5 (5 GSK)	97A51319S5D (Gr) 97A11319S5D (Blk)
9700MWD (10 GSK)	97A51319S10D(Gr) 97A11319S10D (Blk)

Analog Cordless 2-Line Speakerphone	Part Number
9702MWD5 (5 GSK, USB)	97A52319S5DU(Gr) 97A12319S5DU (Blk)
9702MWD (10 GSK, USB)	97A52319S10DU(Gr) 97A12319S10DU (Blk)
9702MWD5 (5 GSK)	97A52319S5D(Gr) 97A12319S5D (Blk)
9702MWD (10 GSK)	97A52319S10D(Gr) 97A12319S10D (Blk)

Analog Remote Handsets	Part Number
1 Line	97A51319S0HK(ClGr)/97A11319S0HK (Blk)
1 Line - USB	97A51319S0HKU(Gr) 97A11319S0HKU (Blk)
2 Line	97A52319S0HK(ClGr)/97A12319S0HK (Blk)
2 Line - USB	97A52319S0HKU(Gr) 97A12319S0HKU (Blk)

VoIP Corded 1-Line	Part Number
3500IP LBY (0 GSK, Lobby)	35V50N0L3 (Gr) 35V10N0L3 (Blk)
3500IP MWB (0 GSK)	35V510N0D3 (Gr) 35V110N0D3 (Blk)
3500IP MWD5(5 GSK, USB, Spkr)	35V510S5DU3 (Gr) 35V110S5DU3 (Blk)
3500IP MWD(10 GSK, USB, Spkr)	33V510S10D3 (Gr) 35V110S10DU3 (Blk)
3500IP MWD5 (5 GSK, Spkr)	35V510S5D3 (Gr) 35V110S5D3 (Blk)
3500IP MWD (10 GSK, Spkr)	35V510S10D3 (Gr) 35V110S10D3 (Blk)

VoIP Corded 2-Line	Part Number
3502IP MWD5(5 GSK, USB, Spkr)	35V520S5DU3 (Gr) 35V120S5DU3 (Blk)
3502IP MWD(10 GSK, USB, Spkr	35V520S10DU3 (Gr) 35V120S10DU3 (Blk)
3502IP MWD5 (5 GSK)	35V520S5D3 (Gr) 35V120S5D3 (Blk)
3502IP MWD (10 GSK)	35V520S10D3 (Gr) 35V120S10D3 (Blk)

VoIP Trimline	Part Number
3500TRM-IP (1 Line)	35V510N0T3 (Gr) 35V110N0T3 (Blk)
3502TRM-IP (2 Line)	35V520N0T3 (Gr) 35V120N0T3 (Blk)

Analog Corded 1-Line	Part Number
3500MW3 (3 GSK, USB)	35A510N3DU (Gr) 35A110N3DU (Blk)
3500MW5 (5 GSK, USB)	35A510N5DU (Gr) 35A110N5DU (Blk)
3500MW10 (10 GSK, USB)	35A510N10DU (Gr) 35A110N10DU (Blk)
3500LBY (0 GSK)	35A50N0L (Gr) / 35A10N0L (Blk)
3500MWB (0 GSK)	35A510N0D (Gr) 35A110N0D (Blk)
3500MW3 (3 GSK)	35A510N3D (Gr) 35A110N3D (Blk)
3500MW5 (5 GSK)	335A510N5D (Gr) 35A110N5D (Blk)
3500MW10 (10 GSK)	35A510N10D (Gr) 35A110N10D (Blk)
3500MWS (0 GSK, USB, Spkr)	35A510S0DU (Gr) 35A110S0DU (Blk)
3500MWD3 (3 GSK, USB, Spkr)	35A510S3DU (ClGr) 35A110S3DU (Blk)
3500MWD5 (5 GSK, USB, Spkr)	35A510S5DU (ClGr) 35A110S5DU (Blk)
3500MWD (10 GSK, USB, Spkr)	35A510S10DU (ClGr) 35A110S10DU (Blk)

9700/3500 Part Numbers Continue on Next Page...

9700/3500 Part Numbers Continued

Analog Corded 1-Line (Continued)	Part Number
3500MWS (0 GSK, Spkr)	35A510S0D (Gr) 35A110S0D (Blk)
3500MWD3 (3 GSK, Spkr)	35A510S3D (Gr) 35A110S3D (Blk)
3500MWD5 (5 GSK, Spkr)	35A510S5D (Gr) 35A110S5D (Blk)
3500MWD (10 GSK, Spkr)	35A510S10D (Gr) 35A110S10D (Blk)
Analog Corded 2-Line	**Part Number**
3502MWS (0 GSK, USB, Spkr)	35A520S0DU (Gr) 35A120S0DU (Blk)
3502MWD3 (3 GSK, USB, Spkr)	35A520S3DU (Gr) 35A120S3DU (Blk)
3502MWD5 (5 GSK, USB, Spkr)	35A520S5DU (Gr) 35A120S5DU (Blk)
3502MWD (10 GSK, USB, Spkr)	35A520S10DU (Gr) 35A120S10DU (Blk)
3502MWS (0 GSK, Spkr)	35A520S0D (Gr) 35A120S0D (Blk)
3502MWD3 (3 GSK, Spkr)	35A520S3D (Gr) 35A120S3D (Blk)
3502MWD5 (5 GSK, Spkr)	35A520S5D (Gr) 35A120S5D (Blk)
3502MWD (10 GSK, Spkr)	35A520S10D (Gr) 35A120S10D (Blk)
Analog Trimline	**Part Number**
3500TRM(1 Line)	35A510N0T (Gr) / 35A110N0T (Blk)
3502TRM(2 line)	35A520N0T (Gr) / 35A120N0T (Blk)

Color Options:









Classic Retro Styling

Retro Series hotel phones add timeless style and a vintage look to any guest room. Great for lobby and common areas, the Retro is not only classy and distinctive, but is always in style. Go classic! Choose Retro Series in single-line desk or wall configurations in Ash or Black.

Design & Functionality

- One-line corded analog telephone
- Compatible with all major PABX systems
- 8 step handset volume control
- High/Low and On/Off ringer settings (hidden switch)
- Commercial grade construction
- Desk or wall-mountable

Single-Line Phone	Part Number
Retro Desk	26009 (Ash) / 260091 (Blk)
Retro Wall	29009 (Ash) / 290091 (Blk)

Specifications

Footprint (Desk): 5.5" x 9.75" x 6.75"
Footprint (Wall): 5.5" x 7"
Weight: 2.4lbs. (1170g)
Line Voltage: Auto-Detect
Line Current: 20mA-80mA
Certifications: FCC Part 68, FCC Part 15 & UL 1459 Ref.
Compliance: ADA/FCC Hearing Aid Compliant
Ringer Equivalence: 0.6dB (2510D-e) and 1.1dB (2510D/2554W/205TMW)
Handset Coil Cord: 10ft (3.048m)
Line Cord: RJ11 Line Cords
Packaging: 6 units per case, 24lbs.



TeleMatrix 3100 Series

Color Options:









Design & Functionality

- Optional professional quality speakerphone
- OneTouch voicemail retrieval button technology on most models
- 0, 3, 5, or 10 programmable guest service keys
- Compatible with all major PBX systems
- 3-way conference calling (2-line models only)
- Convenient data port
- 3-step speaker and handset volume control
- High/Low ringer volume switch
- Full-length custom-tailored faceplates
- Industrial grade construction with matte finish
- Non-slip base
- Optional wall-mount bracket available separately.

Elegant Contours. Budget Friendly.

An excellent combination of style and economy, TeleMatrix 3100 Series telephones feature a unique sweeping contour design, along with a rich telephony feature set that makes this phone perfect for all of your analog corded guestroom applications. TeleMatrix 3100 Series phones, familiar to the hospitality industry with a design that sets it apart from your everyday guestroom phone, are available with 0, 3, 5, or 10 programmable guest service keys, an optional speakerphone, a large customizable faceplate area, and patented OneTouch message-retrieval technology.

Specifications

Footprint: 9" x 6.25" x 3.5"
Weight: 1.4lbs. (630g)
Power: Line
Operating Voltage: 24-56 VDC
Humidity: 65% ± 20%
Temperature: 77°F ± 50° (25°C ± 10°C)
FCC Specifications: FCC Part 15 Support B: 2009
Safety Standard: ETL & CE
Handset: Hearing Aid Compatible(Standard/Euro)
Coil-Cord: 10ft (3.048m)
Line Cord: 12ft. RJ11 (1-Line) RJ14 (2-Line) line cord
Packaging: 10 per case

Single-Line Non-Speakerphone	Part Number
3100LBY 1L, Lobby	310091 (Blk) 31009 (Ash)
3100MWB 1L, Basic, MW	310391 (Blk) 31039 (Ash)
3100MW5 1L, 5GSK, MW	311391 (Blk) 31139 (Ash)
Single-Line Speakerphone	**Part Number**
3100MWD5 1L, 5GSK, MW, Spkr	311491 (Blk) 31149 (Ash)
3100MWD 1L, 10GSK, MW, Spkr	313391 (Blk) 31339 (Ash)
3100MW10 1L, 10GSK, MW	312391 (Blk) 31239 (Ash)
Two-Line Speakerphone	**Part Number**
3102MWS 2L, MW, Spkr	320491 (Blk) 32049 (Ash)
3102MWD5 2L, 5GSK, MW, Spkr	321491 (Blk) 32149 (Ash)
3102MWD 2L, 10GSK, MW, Spkr	323591 (Blk) 32359 (Ash)

CE FC Features and specifications are subject to change without notice. The values for mass and dimension are approximate.









Specifications

Footprint: 9.5" x 6.75" x 3.5"
Weight: 3.6lbs. (1632g)
Line Voltage: 24-52 VDC (+/-)
Line Current: 20mA-100mA Auto detect for 90 VDC Neon or Low Voltage LED
Certifications: FCC Part 68, FCC Part 15 & UL 1459 Ref. CE ETL
Compliance: ADA/FCC Hearing Aid Compliant RoHS Environmentally Compliant
Ringer Equivalence: 1.3dB
Max Power Output: 18.11 dBm
Antenna Gain: 0 dBi
Frequency Range (9600): 1.8GHz and 1.9GHz
Frequency Range (9400): 2.4 GHz (2400-2480.544 MHz)
Handset: ADA/FCC Hearing Aid Compliant
Line Cord: RJ45 Line Cords—12 ft/3.66 m
Line Cord (Analog): RJ14 Line Cord—12 ft/3.66 m
Packaging: 10 per carton

Smart Features. Legendary Performance.

The TeleMatrix 9600 and 9400 Series cordless phones deliver reliable performance with a modern, flat-panel design that complements today's guest rooms. Custom handset accents coordinate with room décor, while patented OneTouch voicemail access, Ethernet pass-through connectivity, and AutoSync handset pairing provide seamless functionality. Optional battery backup helps maintain connectivity during power outages.

Design & Functionality

- Available in 1 or 2-line cordless configurations
- Speakerphone
- Additional remote handsets available in 1 or 2-line
- OneTouch voicemail retrieval technology
- 5 or 10 programmable guest service keys
- Compatible with all major PABX systems
- 3-way conference calling (2-line models only)
- Convenient data port
- Choose 1.8 GHz or 1.9 GHz frequency
- Full-length customizable faceplates
- Industrial grade construction with matte finish
- Non-slip base
- For an additional charge, choose from seven handset cradle insert color options to match your brand, office, or guest room decor. For handset insert color part numbers, add the following suffixes at the end of the ash or black part number.
  - Orange=ORG/Blue=BLU/Lime=LIM/White=WHI/Gray=GRA/Ochre=OCH/Red=RED
  - Example: 9600MWD Black w/ Red Insert
    - 965591NRED



VoIP Single-Line Speakerphone	Part Number
9600IPMWD5 (5 GSK)	96V21319S5D3(Ash) 96V11319S5D3 (Blk)
9600IPMWD (10 GSK)	96V21319S10D3(Ash) 96V11319S10D3 (Blk)
VoIP Two-Line Speakerphone	**Part Number**
9602IPMWD5 (5 GSK)	96V22319S5D3(Ash) 96V12319S5D3 (Blk)
9602IPMWD (10 GSK)	96V22319S10D3(Ash) 96V12319S10D3 (Blk)
VoIP Remote Handsets	**Part Number**
Handset Kit IP - 1 Line	96V21319N0HK3(Ash) 96V11319N0HK3 (Blk)
Handset Kit IP - 2 Line	96V22319N0HK3(Ash) 96V12319N0HK3 (Blk)
Analog Single-Line Speakerphone	**Part Number**
9600MWD5 (5 GSK)	96459-N(Ash) 964591-N (Blk)
9600MWD (10 GSK)	96559-N(Ash) 965591-N (Blk)
9402MWD5 (5 GSK)	934591-N (Blk) 93459-N (Ash)
9402MWD (10 GSK)	935591-N (Blk) 93559-N (Ash)

Analog Two-Line Speakerphone	Part Number
9602MWD5 (5 GSK)	98459-N(Ash) 984591-N (Blk)
9602MWD (10 GSK)	98559-N(Ash) 985591-N (Blk)
9400MWD5 (5 GSK)	924591-N (Blk) 92459-N(Ash)
9400MWD (10 GSK)	925591-N (Blk) 92559-N (Ash)
Analog Remote Handsets	**Part Number**
9600 Handset Kit - 1 Line	96559HDKIT-N(Ash) 965591HDKIT-N (Blk)
9400 Handset Kit - 1 Line	265591HDKIT-N(Blk) 92559HDKIT-N (Ash)
9600 Handset Kit - 2 Line	98559HDKIT-N(Ash) 985591HDKIT-N (Blk)
9400 Handset Kit - 2 Line	385591HDKIT-N (Blk) 93559HDKIT-N (Ash)

CE FC Features and specifications are subject to change without notice. The values for mass and dimension are approximate.









Specifications

Footprint: 9.5" x 6.75" x 3.5"
Weight: 3.6lbs. (1632g)
Line Voltage: 24-52 VDC (+/-)
Line Current: 20mA-100mA Auto detect for 90 VDC Neon or Low Voltage LED
Certifications: FCC Part 68, FCC Part 15 & UL 1459 Ref. CE ETL
Compliance: ADA/FCC Hearing Aid Compliant RoHS Environmentally Compliant
Ringer Equivalence: 1.3dB
Max Power Output: 18.11 dBm
Antenna Gain: 0 dBi
Frequency Range (9600): 1.8GHz and 1.9GHz
Frequency Range (9400): 2.4 GHz (2400-2480.544 MHz)
Handset: ADA/FCC Hearing Aid Compliant
Line Cord: RJ45 Line Cords—12 ft/3.66 m
Line Cord (Analog): RJ14 Line Cord—12 ft/3.66 m
Packaging: 10 per carton

Smart Features. Legendary Performance.

Bold design, intuitive functionality, and dependable performance define the TeleMatrix 3300 Series corded phones. The sleek flat panel design complements the look of in-room flat screen televisions, helping maintain a consistent guest room aesthetic. Select from seven standard or custom handset cradle accent colors to align with any décor while pairing visual style with practical functionality. Features include patented OneTouch voicemail technology for hands-free auto-dialing and retrieval, as well as an integrated Ethernet pass-through port for guest connectivity. VoIP and analog CID models feature an LCD screen. Matching Trimline phones are also available.

Design & Functionality

- Available in 1 or 2-line cordless configurations
- Speakerphone or non-speakerphone
- LCD screen to display caller ID (VoIP)
- OneTouch voicemail retrieval technology (message-waiting light only on 3300LBY & 3300MWB)
- 0, 3, 5, or 10 programmable guest service keys
- Compatible with all major PBX systems
- 3-way conference calling (2-line only)
- Dual-Port 10/100Mbps ethernet port for HSIA (VoIP)
- Full lenth customizeable faceplates
- Industrial grade construction with matte finish
- Non-slip base
- Optional wall-mount bracket available seperately
- For an additional charge, choose from seven handset cradle insert color options to match your brand, office, or guest room decor. For handset insert color part numbers, add the following suffixes at the end of the ash or black part number.
  - Orange=ORG/Blue=BLU/Lime=LIM/White=WHI/ Gray=GRA/Ochre=OCH/Red=RED
  - Example: 9600MWD Black w/ Red Insert
    - 965591NRED

CE FC

Features and specifications are subject to change without notice. The values for mass and dimension are approximate.

VoIP Single-Line Non-Speakerphone	Part Number
3300IP LBY (0 GSK, Lobby)	33V20N0L3(Ash) 33V10N0L3(Blk)
3300IP MWB (0 GSK)	33V210N0D3(Ash) 33V110N0D3(Blk)
VoIP Single-Line Speakerphone	**Part Number**
3300IP MWD5 (5 GSK)	33V210S5D3(Ash) 33V110S5D3(Blk)
3300IP MWD (10 GSK)	33V210S10D3(Ash) 33V110S10D3(Blk)
VoIP Two-Line Speakerphone	**Part Number**
3302IP MWD5 (5 GSK)	33V220S5D3(Ash) 33V120S5D3(Blk)
3302IP MWD (10 GSK)	33V220S10D3(Ash) 33V120S10S3(Blk)
VoIP Trimline	**Part Number**
3300TRM-IP (1 Line)	33V210N3T3(Ash) 33V110N3T3(Blk)
3302TRM-IP (2 Line)	33V220N3T3(Ash) 33V120N3T3(Blk)

Analog Single Line Non-Speakerphone	Part Number
3300LBY (0 GSK)	33009(Ash) / 330091(Blk)
3300MWB (0 GSK)	33039(Ash) / 330391(Blk)
3300MW5 (5 GSK)	33139(Ash) / 331391(Blk)
3300MW10 (10 GSK)	33239(Ash) / 332391(Blk)
Analog Single-Line Speakerphone	**Part Number**
3300MWD5 (5 GSK)	33149(Ash) / 331491(Blk)
3300MWD (10 GSK)	33339(Ash) / 333391(Blk)
Analog Two-Line Speakerphone	**Part Number**
3302MWD5 (5 GSK)	34149(Ash) / 341491(Blk)
3302MWD (10 GSK)	34359(Ash) / 343591(Blk)
3302CID5 (5 GSK, Special Order)	34849(Ash) 348491(Blk)
3302CID (10 GSK, Special Order)	34859(Ash) 348591(Blk)
Analog Trimline	**Part Number**
3300TRM (1 Line)	33119(Ash) / 331191(Blk)
3302TRM (2 line)	34159(Ash) / 341591 (Blk)

CE FC Features and specifications are subject to change without notice. The values for mass and dimension are approximate.

Scitec Aegis-08 Series

Color Options:









Single-Line Non-Speakerphone	Part Number
Aegis-LB-08 Lobby 1L	80102 (Blk) / 80101 (Ash)
Aegis-P-08 1L, Basic, MW	80002 (Blk) / 80001 (Ash)
Aegis-3-08 1L, 3GSK, MW	80302 (Blk) / 80301 (Ash)
Aegis-5-08 1L, 5GSK, MW	80502 (Blk) / 80501 (Ash)
Aegis-10-08 1L, 10GSK, MW	81002 (Blk) 81001 (Ash)
Single-Line Speakerphone	**Part Number**
Aegis-PS-08 1L, Basic, MW, Spkr	80012 (Blk) 80011 (Ash)
Aegis-3S-08 1L, 3GSK, MW, Spkr	88032 (Blk) 88031 (Ash)
Aegis-5S-08 1L, 5GSK, MW, Spkr	88052 (Blk) 88051 (Ash)
Aegis-10S-08 1L, 10GSK, MW, Spkr	88102 (Blk) 88101 (Ash)
Two-Line Speakerphone	**Part Number**
Aegis-TP-08 2L, Basic, MW	89002 (Blk) 89001 (Ash)
Aegis-T5-08 2L, 5GSK, MW, Spkr	89052 (Blk) 89051 (Ash)
Aegis-T-08 2L, 10GSK, MW, Spkr	89102 (Blk) 89101 (Ash)

Value Never Looked So Good.

Aegis-08 telephones, the standard for economy branded hotels, now offer improved styling and more features! These rugged, trouble-free products are all line-powered— no need for an external power plug.

Design & Functionality

- One and Two-Line Telephones
- Optional Professional Quality Speakerphone
- OneTouch Voicemail Retrieval Technology (except Aegis-LB-08 & Aegis-P-08)
- 0, 3, 5, or 10 programmable guest service keys
- Compatible with All Major PBX Systems
- Soft Key Technology
- Full Length Custom Tailored Faceplate Area
- Industrial Grade Construction with Matte Finish
- Non-Slip Base
- Dual NEON/LED Message Waiting Light Bar
- 4 Step Speaker and Handset Volume Control
- High/Low Ringer Volume Switch
- HAC-Compatible Handset and ADA-Compliant Volume Control
- Speaker and Mute Keys (Speakerphone Models)
- LED On/Off Indication for Hold, Mute, and Line Keys
- Optional wall-mount bracket available seperately.

Specifications

Footprint: 8.75" x 6" x 3"
Weight: 2.5lbs. (1170g)
Line Voltage: Auto-Detect
Line Current: 20mA-80mA
Certifications: FCC Part 68, FCC Part 15 & UL 1459 Ref.
Compliance: ADA/FCC Hearing Aid Compliant
Ringer Equivalence: 0.6dB
Handset Coil-Cord: 10ft (3.048m)
Line Cord: 12ft. RJ11 (1-line) RJ14 (2-line) line cord

SCITEC a Cetis brand

CE FC

Features and specifications are subject to change without notice. The values for mass and dimension are approximate.

Scitec H3000 Series

Color Options:









H3000	Part Number
H3000 (Blk)	HA110S6D (Blk)
H3000 (Wht)	HA510S6D (Wht)

Specifications

Footprint: 9.5" x 6.25" x 3.75"
Weight: 2.5lbs. (1170g)
Line Voltage: Auto-Detect
Line Current: 20mA-80mA
Certifications: FCC Part 68, FCC Part 15 & UL 1459 Ref
Compliance: ADA/FCC Hearing Aid Compliant
Ringer Equivalence: 0.6dB
Handset Coil-Cord: 10ft (3.048m)
Line Cord: RJ11 line cord - 12 ft (3.66m)
Packaging: 10 per carton

CE FC Features and specifications are subject to change without notice. The values for mass and dimension are approximate.

The Big Button Advantage

The H3000 big-GSK telephone helps guests quickly and intuitively dial for food or transportation services directly from the hotel guest room, lobby, or concierge station when you pre-program guest service keys to direct-dial onproperty or local service vendors. Generate incremental revenue by leasing guest service key connections to food and service vendors. Available in single line analog models in Black or White, Scitec H3000 phones help facilitate service connections, drive revenue, and provide years of dependable time-saving service for your staff.

Design & Functionality

- Single-Line Analog Speakerphone
- Compatible with All Major Analog PABX Systems
- 6 Big Programmable Speed Dial Memory Keys
- Big Dial Pad Buttons with Braille
- OneTouch Message-Waiting Button that supports high (neon) and low (LED) message-waiting signals and optional FSK message waiting
- Volume Boost Key—6 decibel volume increase in handset receiver
- Visual Ring Indicator Light Provides Hard of Hearing Patients with a Visual Notification of an Incoming Call
- Side-Mounted RJ11 Data-port Provides Access for Laptops and Other Devices
- Industrial Grade Construction with Matte Finish Non-Slip Base
- 3-Step Volume Control Key & High/Low Ringer Volume Control
- HAC-Compatible Handset with ADA-Compliant Volume Control
- Desk or Wall-Mountable



Scitec 2500 Series

Color Options:









Specifications

Footprint Desk: 9″ x 5.5″ x 4″
Footprint Wall: 9″ x 4.25″ x 6″
Footprint 205T: 9″ x 4″ x 4″
Weight: 2.5lbs.
Line Voltage: Auto-Detect
Line Current: 20mA-80mA
Certifications: FCC Part 68, FCC Part 15 & UL 1459 Ref
Compliance: ADA/FCC Hearing Aid Compliant
Ringer Equivalence: 0.6dB (2510D-e)
1.1dB (2510D/2554W/205TMW)
Handset Coil-Cord: 10 ft (3.048m)
Line Cord: RJ11 Line Cords 12 ft/3.66 m (2510D/2510DMW, 2510D-e/2510D-eMW)
RJ11 Line Cords 5 in/12.7 cm (205T/205TMW)
Packaging: 12 Units, 31lbs/14.06kg (2554W)
8 Units, 24lbs/10.89kg (2510D)
16 Units, 32lbs/14.51kg (205TMW)

CE FC Features and specifications are subject to change without notice. The values for mass and dimension are approximate.

The Timeless Standard.

Scitec industry standard 2500 sets are designed to operate in the most demanding work environments. In the office, warehouse or plant, on military bases, and local, state, and federal government properties, Scitec desk and wall telephones are on the job.

Design & Functionality

- Single-Line Telephones
- Compatible with All Major PABX Systems
- RJ11 Data Port (2510D/2510D-e/205TMW)
- Double-Gong Bell Ringer (2510D)
- Electronic Ringer (2510D-e)
- Single-Gong Bell Ringer (2554W)
- Optional Message Waiting Light
- Flash, Redial, and Hold Keys (205TMW)
- Lighted Dial Keys (205TMW)
- Industrial Grade Construction with Matte or Gloss Finish Design
- Non-Slip Base
- HAC-Compatible Handset and ADA-Compliant
- Volume Control
- 5-Year Warranty (2510D/2554)
- 2-Year Warranty (205TMW)
- 1-Year Warranty (2510D-e)

Single-Line Desk Set	Part Number
2510D (no MW)	25001 (Ash) / 25002 (Blk)
2510D MW	25011 (Ash) / 25012 (Blk)
2510D-e (no MW)	25101 (Ash)
2510D-e MW	25111 (Ash)
Single-Line Wall Set	**Part Number**
2554W (no MW)	25401 (Ash) / 25402 (Blk)
2554W MW	25411 (Ash) / 25412 (Blk)
Single-Line Wall Set	**Part Number**
205TMW	20521 (Ash) / 20515 (Wht)



Scitec Emergency Series









Specifications

Footprint 2554e: 8.75" x 4" x 4.5"
Footprint 2510e: 9" x 8.75" x 5"
Footprint Aegis-LBE-08: 8.75" x 6" x 2.75"
Weight: 2.5lbs. (1170g)
Line Voltage: Auto-Detect
Line Current: 20mA-80mA
Certifications: FCC Part 68, FCC Part 15 & UL 1459 Ref.
Compliance: ADA/FCC Hearing Aid Compliant
Ringer Equivalence: 0.6dB (Aegis-LBE-08)
1.1dB (2510e and 2554e)
Handset Coil-Cord: 10 ft (3.048m)
Line Cord: RJ14 line cord - 12 ft (3.66m)
Packaging: 12 Units, 31lbs/14.06kg (Aegis-LBE-08/2554e)
8 Units, 24lbs/10.89kg (2510e)

CE FC Features and specifications are subject to change without notice. The values for mass and dimension are approximate.

Always Be Prepared

Scitec emergency telephones help prepare your facilities to meet the communications needs of staff and customers when time matters most. Choose the Aegis-LBE-08 with full-length red emergency faceplate or red 2510e or 2554e desk and wall sets.

Design & Functionality

- One-Line Telephone
- Full-Length Red Emergency Faceplate(Aegis-LBE-08)
- Dual NEON/LED Message Waiting Light (Aegis-LBE-08)
- Wall Mount Bracket Sold Separately (Aegis-LBE-08)
- RJ11 Data Port (Aegis-LBE-08/2510e)
- Industrial Grade Construction with Matte or Gloss Finish
- Non-Slip Base
- Compatible with All Major PABX Systems
- Volume Control Toggle Key (Aegis-LBE-08)
- 4 Step Handset Volume Control (Aegis-LBE-08)
- High/Low Ringer Volume Control (Aegis-LBE-08/2510e)
- HAC-Compatible Handset
- ADA-Compliant Volume Control

Single-Line Phone	Part Number
Aegis-LBE-08	80103 (Ash) / 80123 (Blk)
2510e Desk Set	25003 (Red)
2545e Wall Set	25403 (Red)





Custom Faceplates
Crystal HD Printing
Pre-Approved Compliance

Take care of the entire room with Cetis.

TOPS Printing provides custom phone faceplates for hotel phones, along with signage and printed materials that help keep your property compliant from day one.

Now available: Crystal HD printing — waterproof, ultra-durable material designed to resist tearing and stand up to daily use.



Get In Touch!

Global Headquarters:
4975 N. 30th St.
Colorado Springs, CO 80919

US/Canada:
+1.719.638.8821
info_USCA@Cetis.com

Carribean/Latin America
+52.998.830.1593
info_CALA@Cetis.com

Europe
+44.0.1908.904860
infoea@Cetis.com

Asia/Pacific
+65.96626959
info_ASIA@Cetis.com

Middle East/Africa
+971.4.2806395
info_ME@Cetis.com

India
+91.9167976116
VSingh@Cetis.com
RVarghese@Cetis.com

Websites:
- CetisGroup.com
- Teledex.com
- TeleMatrix.net
- ScitecInc.com
- CetisHealthcare.com
- CetisAppliances.com
- TopsTops.net

Social: @CetisInc





TSOC HOSPITALITY

web: www.tsochospitality.com
email: hospitality@tsoc.com
phone: 1-888-258-8762